

Planters

Implements

Disc Blades

Tillage
Tools



2240 Semi-Stubble GCRO

Wheel Offset Disk Harrow

*Working Width
12 to 25 ft.*

***RUGGEDLY BUILT
FOR LONGER LIFE***



The model GCRO Offset Disk Harrow is specially designed for large acreage farm operations. It is the ideal implement for soil leveling, breaking clods and incorporating soil with crop residue.



Standard Features:

- TATU oil bath bearings assemblies with tapered roller bearings and duo-cone seals.
- Bolt on heavy duty bearing wear plates.
- 1.5/8" (41.3mm) round heat treated alloy steel gang axles.
- Cast iron spacer spools, 10.5/8" spacing.
- Disc blades notched front and rear.
- Heavy duty adjustable disc blade scrapers.
- Two dual 12.5L x 15" 12 ply rib implement tires with heavy duty 8 bolt wheel hubs (wheel and tires are not included).
- Hydraulic cylinder control group includes two hydraulic cylinders and hoses ram stops for depth control, transport lock.
- Quick adjustable swing tongue.
- Spring loaded self leveling hitch.
- Adjustable gang angles of 18, 20 and 22 degrees.
- Rear mounted hitch with hydraulic outlet.
- Rear hook for leveling bar.
- Drawbar jackstand and safety chain.
- Wing fold models include hydraulic folding cylinders, hoses and fittings.

Optional equipment:

- Bolt on furrow filler extension blade.
- Disc blades notched front smooth rear.
- Disc blades smooth front and rear.
- Tapered right rear gang assemblies.

Specifications:

Model	Type	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power	
				Dimensions	Spacing			
2240 Semi Stubble GCRO		28	12' 1" (3,680)			7,568 (3,440)	100 - 125	
		32	13' 9". (4,190)			8,206 (3,730)	125 - 175	
	Non	36	15' 5" (4,700)	Ø 26"x6,0mm		8,844 (4,020)	125 - 200	
	Folding	40	17' 1" (5,205)			9,482 (4,310)	150 - 225	
			44	18' 9" (5,715)	or	10.5/8 in. (270 mm)	10,120 (4,600)	175 - 250
			48	20' 5" (6,220)	Ø 28"x7,5mm		10,758 (4,890)	200 - 275
	Folding	52	22' 1" (6,730)			12,628 (5,740)	220 - 295	
	Wing*	56	23' 9" (7,240)			13,838 (6,290)	235 - 320	
		60	25' 9" (7,772)			15,048 (6,840)	250 - 345	

* Transport Width - 52, 56 and 60 Disc Blades: 15 ft. 4 in (4,670 mm).

** Approx. Net Weight - 2240 GCRO with 26 in. blades - Approx. Depth of Cut: up to 8.5/8" (220mm).




**Folding Wing
for easy
transportation
on models 2240
Semi Stubble
GCRO with 52,
56 and 60 disc
blades.**



- 1 - Rear hitch.
- 2 - Rear hook for leveling bar.
- 3 - Rear gang offset adjustment ratchet.
- 4 - Rear outlet to allow hitching of other implements.

RUGGEDLY BUILT FOR LONGER LIFE

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

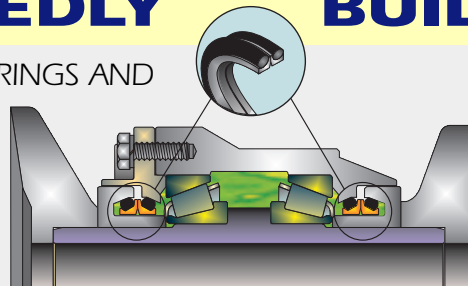

THE LONGER LIFE OF OUR DISK HARROW DEPENDS ON ORIGINAL TATU REPLACEMENT PARTS.



SPECIAL OIL BATH BEARING ASSEMBLIES



MARCHESAN - TATU PRODUCTS

Av. Marchesan, 1979 - P.O. Box 131 - ZIP 15994-900 - Matão-SP-Brazil

Fone: (55) 16 3382-8282 - Fax: (55) 16 3382-1003 / 3382-3607

www.marchesan.com.br e.mail: tatu@marchesan.com.br

MARCHESAN S.A. reserves the right to improve or modify its products, changing the specifications, without previous notice. - 10/2005 - Edition 02