

Planters

Implements

Disc Blades

Tillage
Tools



7012 GCRO

Semi Stubble Offset Wheel Disk Harrow



**Working Width
12 to 25 ft.**

**RUGGEDLY BUILT
FOR LONGER LIFE**



The model **7012 GCRO** is specially designed for large acreage farming operations, to incorporate crop residue, level soil and breaking clods.

Standard Features:

- Equipped with TATU oil bath bearing assemblies with tapered roller bearings and duo-cone seals.
- Bolt on heavy duty bearing wear plates.
- 1.3/4" (44.45mm) round heat treated alloy steel gang axles.
- Heat treated boron steel disc blades, notched front and rear.
- Available with 30" or 32" diameter disc blades.
- Cast iron spacer spools.
- Heavy duty adjustable disc blade scrapers.
- Dual heavy duty 8 bolt hubs less tires and wheels. (Recommended 12.5L x 15" - 12 ply tires).
- Hydraulic cylinder control group includes two hydraulic cylinders, hoses, ram stops for depth control and transport locks.
- Adjustable gang axles of 18, 20 and 22 degrees.
- Drawbar jackstand and safety chain.
- Rear mounted hitch with hydraulic outlet.
- Rear hook for leveling bar.

Optional equipment:

- Bolt on furrow filler extension blade.
- Disc blades notched front and plain on rear.
- Disc blades plain front and rear.
- Tapered right rear gang assemblies.

Specifications:


Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Weight per Disc lbs (Kg)	Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing			
7012 GCRO Non Folding	28	12' 10" (3,920)	30"x7,5mm		414 (188)	11,616 (5,280)	125 - 150
	32	14' 8" (4,475)	and	11.13/16"	392 (178)	12,518 (5,690)	150 - 200
	36	16' 6" (5,030)	32"x7,5mm	(300mm)	363 (165)	13,090 (5,950)	175 - 225
	40	18' 4" (5,590)			341 (155)	13,662 (6,210)	200 - 250
7012 GCRO Folding Wings	48	22' 4" (6,810)	30"x7,5mm	11.13/16"	343 (155)	16,464 (7,470)	225 - 295
	50	23' 3" (7,080)	and	(300mm)	334 (152)	16,720 (7,600)	250 - 320
	54	25' 0" (7,635)	32"x7,5mm		335 (152)	18,183 (8,250)	275 - 345

* Approx. net weight with 32" x 7.50mm disc blades. - Approx. depth of cut: up to 8.5/8" (220mm).
> Transport width - 48 and 50 disc blades: 16 ft. 8 in.

RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

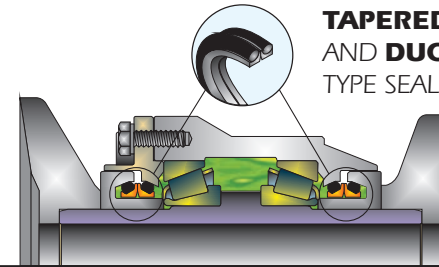

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.



Folding wings for easy transportation on models with 48 and 54 disc blades.

Planters

Implements

Disc Blades

Tillage Tools

MARCHESAN - TATU PRODUCTS
 Av. Marchesan, 1979 - P.O. Box 131 - ZIP 15994-900 - Matão-SP-Brazil
 Fone: (55) 16 3382-8282 - Fax: (55) 16 3382-1003 / 3382-1009
www.marchesan.com.br e.mail: tatu@marchesan.com.br

MARCHESAN S.A. reserves the right to improve or modify its products, changing the specifications, without previous notice. The photos are merely illustrative. - 04/2008 - Edition 02