

Planters

Implements

Disc Blades

Tillage
Tools



7010 GCRO

Semi Stubble Wheel Offset Disk Harrow

**TOUGHER
THAN EVER**

- * **Stronger Frame**
- * **Stronger Transport System**
- * **New Folding and Lock Mechanism**



**Working Width
12 to 30 ft.**

**RUGGEDLY BUILT
FOR LONGER LIFE**

The model **7010 GCRO** is specially designed for large acreage farm operations. It is ideal implement for soil leveling, breaking clods and incorporating soil with crop residue.

Standard Features:

- TATU oil bath bearings assemblies with tapered roller blade and duo-cone seals.
- Bolt on heavy duty bearing wear plates.
- 1.5/8" (41.3mm) round heat treated alloy steel gang axles.
- Heat treated boron steel disc blades, notched front and rear.
- Available with 26", 28" or 30" diameter disc blades.
- Cast iron spacer spools.
- Heavy duty adjustable disc blade scrapers.
- Dual heavy duty 8 bolt hubs less tires and wheels. (Recommended 12.5L x 15" - 12 ply tires).
- Hydraulic cylinder control group includes two hydraulic cylinders and hoses ram stops for depth control, transport lock.
- Quick adjustable swing tongue.
- Adjustable gang axles of 18, 20 and 22 degrees.
- Drawbar jackstand and safety chain.
- Wing fold models include hydraulic folding cylinders, hoses and fittings.
- Rear mounted hitch with hydraulic outlet.
- Rear hook for leveling bar.

Specifications:


Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Weight per Disc lbs (Kg)	Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing			
7010 GCRO Non Folding	28	12' 1" (3,680)			277 (126)	7,788 (3,540)	100 - 125
	32	13' 9" (4,190)			263 (119)	8,426 (3,830)	125 - 150
	36	15' 5" (4,700)			250 (114)	9,064 (4,120)	150 - 200
	40	17' 1" (5,205)	26"x6,0mm,		242 (110)	9,702 (4,410)	175 - 225
	44	18' 9" (5,715)			237 (108)	10,472 (4,760)	175 - 250
7010 GCRO Folding Wings	48	20' 5" (6,220)	28"x7,5mm	10.5/8"	231 (105)	11,110 (5,050)	200 - 275
	52	22' 1" (6,730)		(270mm)	248 (113)	12,980 (5,900)	220 - 295
	56	23' 9" (7,240)	and		253 (115)	14,190 (6,450)	235 - 320
7010 GCRO Folding Wing Frames	60	25' 9" (7,772)			257 (117)	15,488 (7,040)	260 - 345
	64	27' 2" (8,280)	30"x7,5mm		358 (163)	23,064 (10,484)	300 - 370
	68	28' 10" (8,788)			358 (163)	24,481 (11,128)	325 - 395
	72	30' 7" (9,322)			358 (163)	25,894 (11,770)	350 - 420

* Approx. net weight with 26" x 6.0mm disc blades.
 > Transport width - 52, 56 and 60 disc blades: 15 ft. 4 in (4,670mm). > Approx. depth of cut: up to 8.5/8" (220mm).

RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

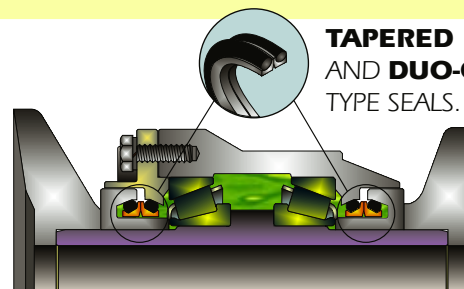

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.

Folding wings for easy transportation on models with 52 to 60 and from 64 to 72 folding wing frames.



Optional equipment:

- Bolt on furrow filler extension blade.
- Disc blades notched front and plain on rear.
- Disc blades plain front and rear.
- Tapered right rear gang assemblies.

- Planters
- Implements
- Disc Blades
- Tillage Tools



MARCHESAN - TATU PRODUCTS

Av. Marchesan, 1979 - P.O. Box 131 - ZIP 15994-900 - Matão-SP-Brazil
 Fone: (55) 16 3382-8282 - Fax: (55) 16 3382-1003 / 3382-1009
www.marchesan.com.br e.mail: tatu@marchesan.com.br

MARCHESAN S.A. reserves the right to improve or modify its products, changing the specifications, without previous notice. - 03/2007 - Edition 01